Specifications. The new BMW X2. sDrive20i.



		BMW X2 sDrive20i		
Body				
No of doors/seats		5/5		
Length/width/height (unladen)	mm	4360 / 1824 / 1526		
Wheelbase	mm	2670		
Track, front/rear	mm	1563 / 1562		
Ground clearance	mm	182		
Turning circle	m	11.3		
Fuel tank capacity	approx. I	51		
Engine oil ¹⁾	<u> </u>	5.25		
Weight, unladen, to DIN/EU	kg	1460 / 1535		
Max load to DIN	kg	595		
Max permissible weight	kg	2055		
Max axle load, front/rear	kg	1055 / 1030		
Max trailer load,	kg	1800 / 750		
braked (12%)/unbraked	3			
Max roofload/max towbar	kg	75 / 80		
download	3			
Luggage comp capacity		470 –1355		
Air resistance	Cd x A	0.29 x 2.37		
Power Unit				
Config/No of cyls/valves		In-line/4/4		
Engine technology		BMW TwinPower Turbo technology: TwinScroll turbocharger, High Precision		
3		Direct Injection, VALVETRONIC fully variable valve control, Double-VANOS		
		variable camshaft timing		
Effective capacity	CC	1998		
Stroke/bore	mm	94.6 / 82.0		
Compression ratio	:1	11.0		
Fuel		min. RON 91		
Max output	kW/hp	141 / 192		
at	rpm	5000 – 6000		
Max torque	Nm	280		
at	rpm	1350 – 4600		
Electrical System				
Battery/installation	Ah/-	70 / Engine compartment		
-		- · · · · · · · · · · · · · · · · · · ·		
Driving Dynamics and Safet	ty			
Suspension, front		Single-joint spring-strut axle in lightweight aluminium-steel construction		
Suspension, rear		Multi-arm axle in lightweight steel construction with separate spring and		
		damper configuration		
Brakes, front		Single-piston floating-calliper disc brakes, vented		
Brakes, rear		Single-piston floating-calliper disc brakes, vented		
Driving stability systems				
		(Dynamic Brake Control), brake drying function, Fading Compensation, Start-		
		Off Assistant, EDLC (Electronic Differential Lock Control), Performance		
Cofety equipment		Control, trailer stability control; optional: Dynamic Damper Control Standard: airbags for driver and front passenger, side airbags for driver and		
Safety equipment		front passenger, head airbags for front and rear seats, three-point inertia-reel		
		seatbelts on all seats (belt latch tensioner and belt force limiter at the front		
		seats), crash sensors, tyre defect indicator		
Steering		Electric Power Steering (EPS) with Servotronic function;		
		optional: M Servotronic		
Steering ratio, overall	:1	15.9		
Tyres, front/rear		225/55 R17 97W		
		225/55 R17 97W		
Rims, front/rear		7.5J x 17 light-alloy /		
		7.5J x 17 light-alloy		

		BMW X2 sDrive20i		
				
Transmission		7 and all Charles also developed the communication		
Type of transmission		7-speed Steptronic dual-clutch transmission		
Gear ratios	<u>l :1</u>	4.154		
	<u>II :1</u>	2.45		
	III :1	1.393		
	IV :1	0.975		
	V :1	0.755		
	VI :1	0.675		
	VII :1	0.547		
	VIII :1			
	R :1	3.357		
Front drive ratio	:1	3.789		
Performance				
Power-to-weight ratio	kg/kW	10.4		
Output per litre	kW/l	70.6		
Acceleration 0–100 km	/h s	7.7		
In 5th gear 80–120 km/h	S			
Top speed	km/h	227		
BMW EfficientDynamics				
BMW EfficientDynamics		Electric Power Steering, Auto Start Stop function, Optimum Shift Indicator,		
standard features				
		aerodynamic attributes, map-regulated oil pump, tyres with reduced rolling		
		resistance		
Fuel Consumption ECE ²⁾	1			
Urban	l/100 km	7.2 – 6.8		
Extra-urban	l/100 km	5.1 – 4.8		
Combined	l/100 km	5.9 – 5.5		
CO ₂	g/km	134 – 126		
Emission rating		EU6		

Specifications apply to ACEA markets/data relevant to homologation apply in part only to Germany (weight)

 $^{^{1)}\}mbox{Oil}$ change $^{2)}\mbox{Fuel consumption}$ and \mbox{CO}_2 emissions depend on the selected tyre format

The new BMW X2. xDrive20d, xDrive25d.

		BMW X2 xDrive20d	BMW X2 xDrive25d		
Body					
No of doors/seats		5/5	5/5		
Length/width/height (unladen)	mm	4360 / 1824 / 1526	4360 / 1824 / 1526		
Wheelbase	mm	2760	2760		
Track, front/rear	mm	1563 / 1562	1563 / 1562		
Ground clearance	mm	182	182		
Turning circle	m	11.3	11.3		
Fuel tank capacity	approx. I	51	51		
Engine oil ¹⁾	арргол. і	6.3	5.0		
Weight, unladen, to DIN/EU	kg	1600/1675	1585/1660		
Max load to DIN	kg	590	595		
Max permissible weight	kg	2190	2180		
Max axle load, front/rear		1120/1100	1125/1085		
Max trailer load,	kg	2000 / 750	2000 / 750		
,	kg	20001130	2000 / 750		
braked (12%)/unbraked Max roofload/max towbar	l.a	75 / 80	75 / 80		
download	kg	73700	73760		
		470 – 1355	470 – 1355		
Luggage comp capacity	Cd x A	0.28 x 2.37	0.29 x 2.37		
Air resistance	Cd x A	0.20 X 2.31	0.29 X 2.31		
Power Unit					
Config/No of cyls/valves		In-line/4/4	In-line/4/4		
Engine technology	BMW TwinPower Turbo technology: turbocharger with variable inlet geometry, common-rail direct injection				
Effective capacity	CC	1995	1995		
Stroke/bore	mm	90.0 / 84.0	90.0 / 84.0		
Compression ratio	:1	16.5	16.5		
Fuel		Diesel	Diesel		
Max output	kW/hp	140 / 190	170 / 231		
at	rpm	4000	4400		
Max torque	Nm	400	450		
at	rpm	1750 – 2500	1500 – 3000		
Electrical System					
Battery/installation	Ah/-	70 / Engine compartment	70 / Engine compartment		
D.:					
Driving Dynamics and Safet Suspension, front	ty	Single-joint spring-strut axle in lightweight	aluminium-steel construction		
Suspension, rear	Multi-arm axle in lightweight steel construction with separate spring and				
	damper configuration				
Brakes, front	Single-piston floating-calliper disc brakes, vented				
Brakes, rear		Single-piston floating-calliper of			
Driving stability systems	Standard: DSC incl. ABS, ASC and DTC (Dynamic Traction Control), DBC (Dynamic Brake Control), brake drying function, Fading Compensation, Start-				
	(D				
	Off Assistant, EDLC (Electronic Differential Lock Control), Performance Control, trailer stability control, HDC (Hill Descent Control), networked with				
		xDrive all-wheel-drive system; optional			
Safety equipment	S	Standard: airbags for driver and front passe			
carety equipment	front passenger, head airbags for front and rear seats, three-point inertia-reel				
	9	seatbelts on all seats (belt latch tensioner a			
		seats), crash sensors, tyre of			
Steering		Electric Power Steering (EPS) with	•		
		optional: M Servo			
Steering ratio, overall	:1	15.9	15.9		
Tyres, front/rear Rims, front/rear		225/55 R17 97W 7.5J x 17 light-alloy	225/55 R17 97W 7.5J x 17 light-alloy		

			BMW X2 xDrive20d	BMW X2 xDrive25d
Transmission				
Type of transmission			8-speed Steptronic	8-speed Steptronic
Gear ratios	1	:1	5.519	5.25
	II	:1	3.184	3.029
	III	:1	2.05	1.95
	IV	:1	1.492	1.457
	V	:1	1.235	1.221
	VI	:1	1.000	1.000
	VII	:1	0.801	0.809
	VIII	:1	0.673	0.673
	R	:1	4.221	4.015
AWD drive ratio		:1	2.851	2.955
Performance				
Power-to-weight ratio	kı	g/kW	11.4	9.3
Output per litre		kW/I	70.2	85.2
Acceleration 0–100) km/h	S	7.7	6.7
In 5th gear 80–120	km/h	S		
Top speed		km/h	221	237
BMW EfficientDynan	nics			
standard features EC		Electric Power Steering, Auto Start Stop function, Optimum Shift Indicator, ECO PRO mode with coasting function, BMW EfficientLightweight, optimised aerodynamic attributes, map-regulated oil pump, tyres with reduced rolling resistance, efficiency- and weight-optimised all-wheel drive, BMW BluePerformance technology		
Fuel Consumption E	∩E ²⁾			
Urban) km	5.4 – 5.2	5.9 – 5.7
Extra-urban		0 km	4.5 – 4.3	4.9 – 4.7
Combined) km	4.8 – 4.6	5.3 – 5.1
CO ₂		g/km	126 – 121	139 – 133
Emission rating		J	EU6	EU6


Specifications apply to ACEA markets/data relevant to homologation apply in part only to Germany (weight) $^{1)}\text{Oil}$ change $^{2)}\text{Fuel consumption and CO}_2$ emissions depend on the selected tyre format

BMW Media Information 10/2017 Page 5


Output and torque diagrams. The new BMW X2.

sDrive20i.




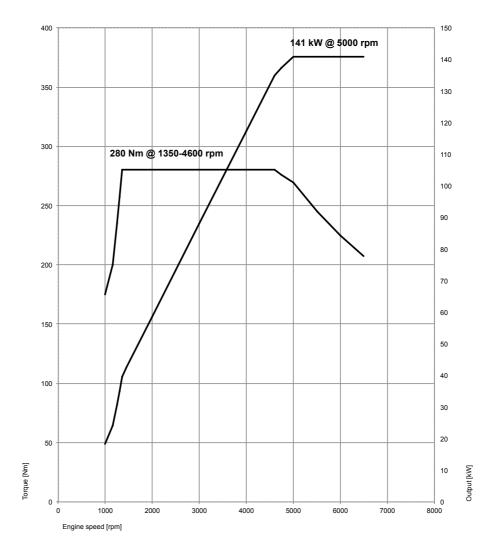



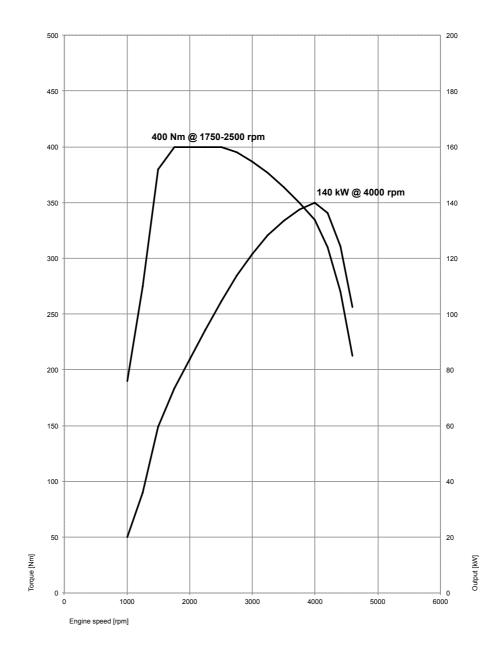



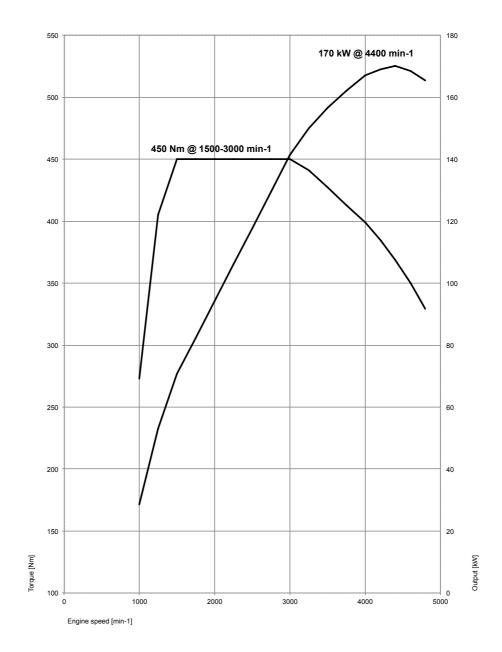

BMW Media Information 10/2017 Page 8

Exterior and interior dimensions. The new BMW X2.



